



Track. Extruded aluminium profile, max. 16 A incl. DALI control lines, rail can be shortened to any length. Housing colour silver grey/white aluminium RAL 9006. Three-phase-track, seven pole. 3x 16A/N/PE + 2x DALI Suitable for luminaires with a 3-ph. track adapter (ET) from Lichtwerk, Global Trac, Eutrac, Iguzzini, Ivela, Powergear, Reggiani, Targetti, Zumtobel and 5-ph. track adapter (DALI) from Lichtwerk, Global Trac.

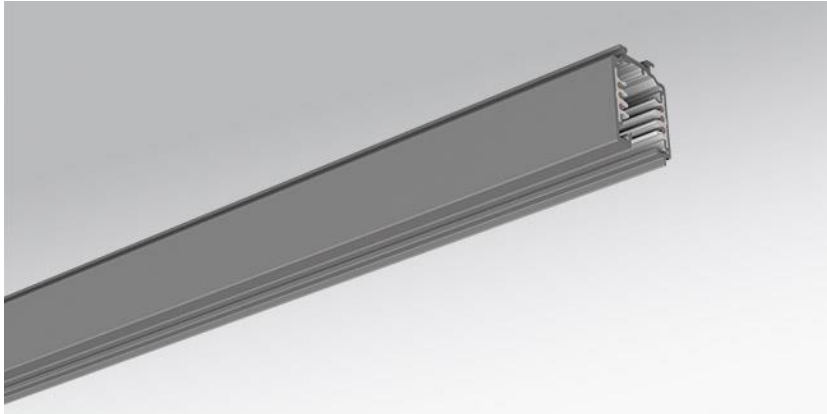

- Article No.: 3244310105
- Housing material: Aluminium
- Housing colour: silver grey/white aluminium RAL 9006
- Type of installation: Track mounting, Light structure
- Certification mark: IP 20, Protection class I, Indoor, CE

## Dimensions



- Dimensions LxWxH/DxH: 3000 x 31.4 x 37.8 (mm)
- Weight (net): 3.4 (kg)

## Lighting/Electrical

- Mains voltage max.: 230 V / 50 Hz