


Controller. Controller box to be placed in false ceiling, with integrated Casambi light control module. Electrical connection via three-pole feed-in and connection terminal with plug-in technology, with integrated protective earth connection and unlocking button, suitable for rigid and flexible cables up to 2,5mm<sup>2</sup>. Five-pole connection cord to be connected to the DALI controlled luminaire. Max. one DALI gear. Housing colour black.

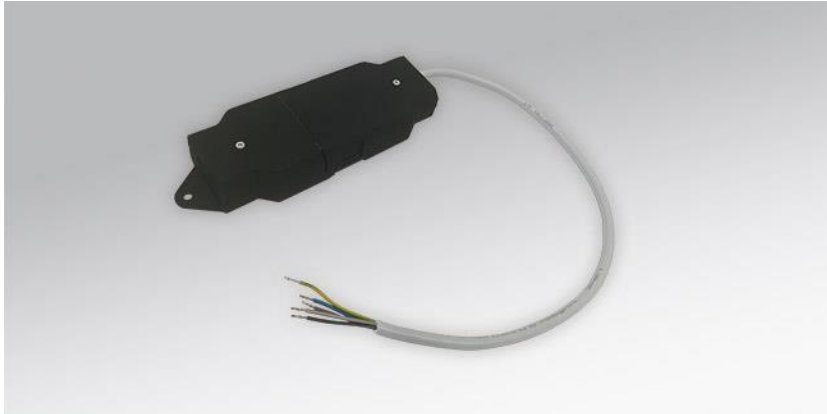

- Article No.: 8400000522
- Housing colour: black
- Certification mark: IP 20, Protection class II, Indoor, CE

## Dimensions

- Dimensions LxWxH/DxH: (mm)
- Weight (net): 0.17 (kg)

## Lighting/Electrical

- Mains voltage max.: 230 V / 50 Hz