


Recessed downlight. Rectangular sheet steel housing with minimalistic rim for cut-out ceilings. Fine structure paint white aluminum (similar to RAL 9006). With fastening springs for tool-free assembly. Housing colour white aluminium RAL 9006 / silver. Direct longitudinal asymmetric distribution. Highly efficient combination of micro cell louvre in silver and longitudinal asymmetrical lens optics. External supply unit with luminaire wired ready for operation. Electrical connection via four-pole connection terminal in plug-in contact technology. DV box 5-pin. Through-wiring five-pin box. If required, please order separately.




- Article No.: 3907746666
- Housing material: steel
- Housing colour: white aluminium RAL 9006 / silver
- Light distribution: direct asymmetrical distribution
- Type of installation: Individual recessed mounting
- Certification mark: IP 20, Protection class II, F, Indoor, CE

## Dimensions

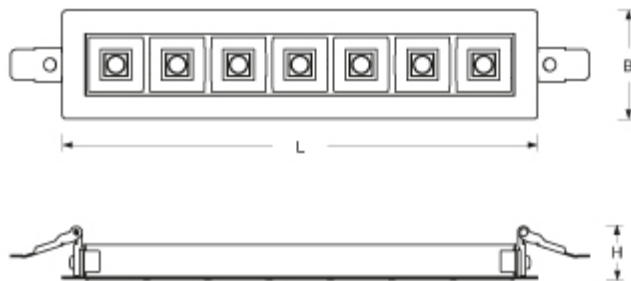

- Dimensions LxWxD: 310 x 71 x 34 (mm)
- External driver housing LxWxD: 120 x 51 x 30 (mm)
- Ceiling system: cut-out ceilings [AD]
- Ceiling cut-out LxW/D: 305 x 50 (mm)
- Ceiling thickness min/max: 1 / 25 (mm)
- Installation depth: 50(AD) (mm)
- Weight (net): 0.5 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 18.6 / 20.7
- Luminaire luminous flux: 1400 (lm)
- LED service life: 100000h L80/B10 (Tq 25°C), 50000h L90/B50 (Tq 25°C)
- Luminaire luminous efficacy: 119 (lm/W)
- System output: 12 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class/light source: B