


phase track luminaire. Sheet steel housing, powder-coated. Housing colour white aluminium RAL 9006. Direct narrow-wide light distribution. Translucent lens optics made of acrylic with additional lateral transmission. For VDU workstations  $65^\circ < 3000\text{cd/m}^2$ ,  $\text{UGR} \leq 19$  according to DIN EN 12464-1. Electrical connection via 3-phase conductor rail + universal adapter for ET (switchable). For conductor rail system Lichtwerk DPSN/DPSNA, Global Trac, Eutrac, Iguzzini, Ivela, Reggiani, Targetti. Available accessories: Tool clip-TT ERW to release luminaire from track (722 9000 100)



- Article No.: 7733444106
- Housing material: steel
- Housing colour: white aluminium RAL 9006
- Light distribution: direct narrow/wide distribution
- Type of installation: Track mounting
- Certification mark: IP 20, Protection class I, VDU  $65^\circ < 3000$ , F, Indoor, CE

## Dimensions

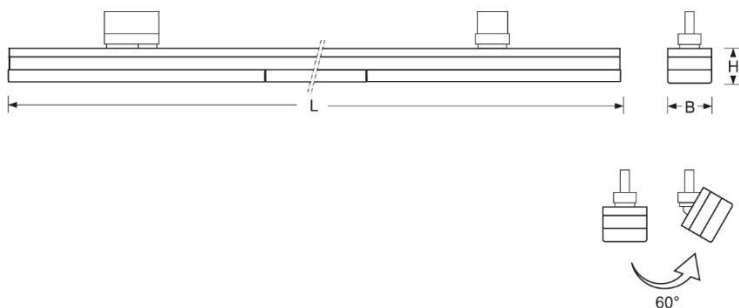

- Dimensions LxWxH/DxH: 1220 x 55 x 40 (mm)
- Weight (net): 2.2 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 98 % / 2 %
- UGR lat/lon: 17.6 / 17.7
- VDU:  $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 4400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 164 (lm/W)
- System output: 27 (W)
- Controller: Electronic driver (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D