


Surface-mounted luminaire. Housing made of powder coated sheet steel. The luminaire is attached solely by clips for 24mm T-rail, included in delivery. Housing colour traffic white RAL 9016. Direct wide light distribution. Translucent lens optics made of acrylic with additional lateral transmission. Electrical connection using pre-assembled, 5-pole connection cable, 2m.




- Article No.: 7691446600
- Housing material: steel
- Housing colour: traffic white RAL 9016
- Light distribution: direct wide distribution.
- Type of installation: Individual surface mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

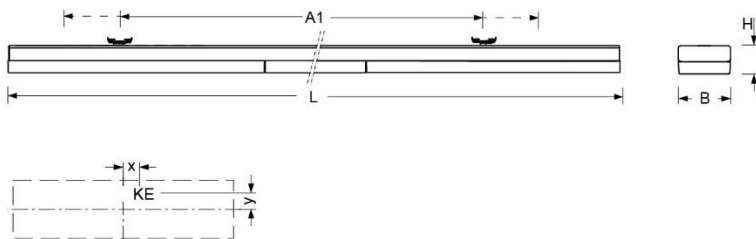

- Dimensions LxWxH/DxH: 1220 x 55 x 30 (mm)
- Ceiling system: ceilings with visible T-rails [s-TS]
- Mounting distance A1 min/max: 756-1179 (mm)
- Weight (net): 2.2 (kg)
- Cable entry KE X/Y: 0 (mm) / 20 (mm)

## Lighting/Electrical

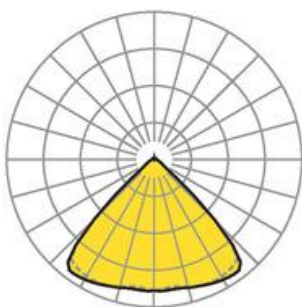

- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 98 % / 2 %
- UGR lat/lon: 19.7 / 20.1
- Luminaire luminous flux: 4400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 165 (lm/W)
- System output: 27 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D