


Surface-mounted luminaire. Round luminaire housing made of deep-drawn sheet steel. Suitable for ceiling and wall installation. Housing colour traffic white RAL 9016. Direct distribution. Round, domed acrylic glass diffuser, with opal frosted, smooth surface. For VDU workstations according to DIN EN 12464-1,  $65^\circ < 3000\text{cd/m}^2$ . Electrical connection via 3-pole plug-in connection terminal. With integrated earth conductor connection and unlocking button, suitable for rigid and flexible cables up to  $2,5\text{ mm}^2$ . Available accessories: Decorative ring sheet steel, silver (231 2000 100).




- Article No.: 2310124110
- Housing material: steel
- Housing colour: traffic white RAL 9016
- Light distribution: direct distribution
- Type of installation: Individual surface mounting
- Certification mark: IP 40, Protection class I, VDU  $65^\circ < 3000$ , Heat filament test  $650^\circ\text{C}$ , F, Indoor, CE, Impact resistance 0.20J

## Dimensions

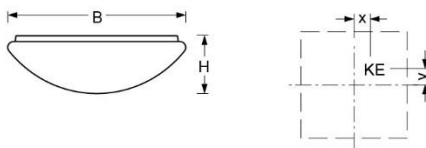

- Dimensions LxWxH/DxH: 373 x 125 (mm)
- Mounting distance A1: 272 (mm)
- Weight (net): 1.4 (kg)
- Cable entry KE X/Y: 77 (mm) / 0 (mm)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 3000K
- Direct/Indirect: 86 % / 14 %
- UGR lat/lon: 20.6 / 20.6
- VDU:  $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 2100 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 116 (lm/W)
- System output: 18 (W)
- Controller: Electronic driver (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D