


Recessed luminaire. Aluminium profile, natural anodised. Surrounding shadow joint between housing and flat inserted film frame. Minimal dirt ingress via sealing lip between frame and housing. For ceiling cut-outs. Suitable for ceilings with visible T-rails. Housing colour aluminium, naturally anodised. Direct distribution. Aluminium profile set flush in the housing with translucent film for a homogenous appearance. Electrical connection via five-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm². Mounting on site or via wire suspension kit, to be ordered separately. Available accessories: Wire suspension kit epic Q-E (630 0000 100), extraction tool epic Q (630 0000 110).




- Article No.: 6241206164
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Individual recessed mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

Dimensions

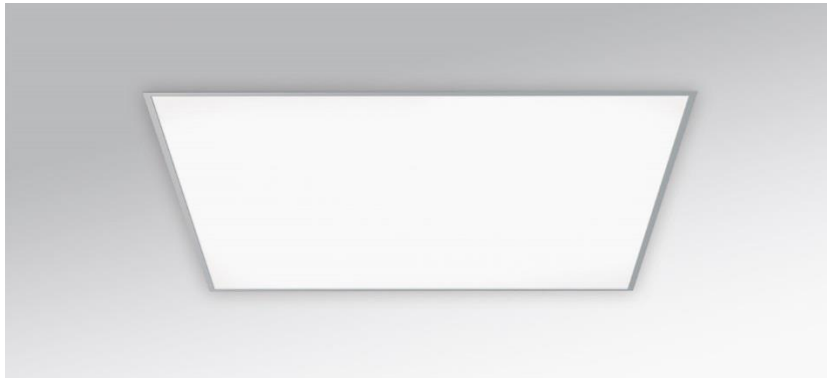

- Dimensions LxWxH/DxH: 1238 x 1238 x 103 (mm)
- Ceiling system: cut-out ceilings [AD], Ceilings with visible T-rails [s-TS] (625x625 mm)
- Ceiling cut-out LxW/D: 1226 x 1226 (mm)
- Ceiling thickness min/max: 1 / 999 (mm)
- Module axis LxW: 1250 x 1250 (mm)
- Installation depth: 160(AD); 160(s-TS) (mm)
- Mounting distance A1: 1150 (mm)
- Weight (net): 33.4 (kg)

Lighting/Electrical

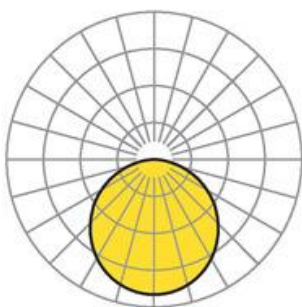

- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 21.6 / 21.6
- Luminaire luminous flux: 18400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 98 (lm/W)
- System output: 187 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: B