


Pendant luminaire. Aluminium profile, natural anodised. Surrounding shadow joint between housing and flat inserted film frame. Minimal dirt ingress via sealing lip between frame and housing. Housing colour aluminium, naturally anodised. Direct distribution. Aluminium profile set flush in the housing with translucent film for a homogenous illumination appearance. Translucent connection cable pre-mounted. Four wire suspension with rapid coupling, free height adjustment between 150 and 2000 mm. Extraction tool for detaching the foil frame must be ordered separately.



- Article No.: 6280906164
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

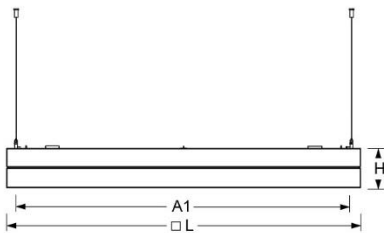

- Dimensions LxWxH/DxH: 904 x 904 x 96 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 850 (mm)
- Weight (net): 18.5 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 21.7 / 21.7
- Luminaire luminous flux: 10700 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 102 (lm/W)
- System output: 105 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: B