


Pendant luminaire. Round aluminium profile, natural anodised. Surrounding shadow joint between housing and flat inserted film frame. Minimal dirt ingress via sealing lip between frame and housing. Housing colour aluminium, naturally anodised. Direct distribution. Aluminium profile set flush in the housing with translucent film for a homogenous illumination appearance. Translucent connection cable pre-mounted. Three wire suspension for epic 950 and 1280 with rapid coupling, free height adjustment between 150 and 2000 mm. Extraction tool for detaching foil frames must be ordered separately.




- Article No.: 6291286154
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

Dimensions

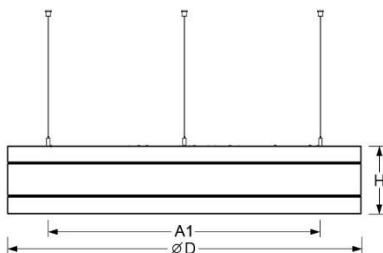

- Dimensions LxWxH/DxH: 1284 x 184 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1043 (mm)
- Weight (net): 34.83 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 21.3 / 21.3
- Luminaire luminous flux: 15200 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 70 (lm/W)
- System output: 218 (W)
- Controller: Electronic driver DALI (4 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C