


Surface-mounted luminaire. Aluminium profile, natural anodised. Face ends sheet steel, painted white aluminium. Concealed sheet steel rail for ceiling mounting without tools. Housing colour aluminium, naturally anodised. Direct distribution. White-opal satin-finished polycarbonate extruded profile with white reflectors. Electrical connection via five-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm<sup>2</sup>. Available accessories: Suction pad SH 55 for removing the diffuser (903 0055 100)




- Article No.: 4350146680
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Individual surface mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

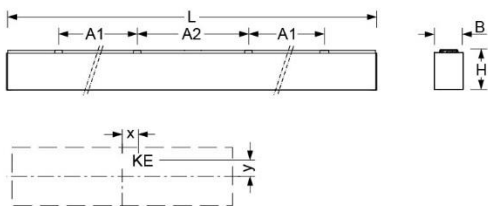

- Dimensions LxWxH/DxH: 2834 x 72 x 102 (mm)
- Mounting distance A1: 1130 (mm)
- Mounting distance A2: 280 (mm)
- Weight (net): 11.4 (kg)
- Cable entry KE X/Y: 875 (mm) / 0 (mm)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 24.8 / 24.9
- Luminaire luminous flux: 6300 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 107 (lm/W)
- System output: 59 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C