


Surface-mounted luminaire. Aluminium profile, natural anodised. Face ends sheet steel, painted white aluminium. Concealed sheet steel rail for ceiling mounting without tools. Housing colour aluminium, naturally anodised. Direct distribution. Transparent polycarbonate extruded profile with an inserted micro-prismatic diffuser and white reflectors. Electrical connection via five-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm<sup>2</sup>. Available accessories: Suction pad SH 55 for removing the diffuser (903 0055 100)




- Article No.: 4350146650
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Individual surface mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

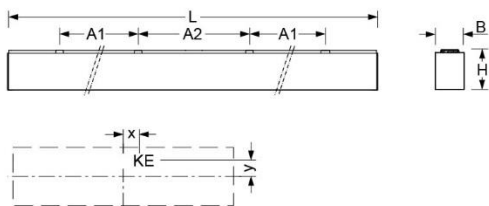

- Dimensions LxWxH/DxH: 2834 x 72 x 102 (mm)
- Mounting distance A1: 1130 (mm)
- Mounting distance A2: 280 (mm)
- Weight (net): 11.8 (kg)
- Cable entry KE X/Y: 875 (mm) / 0 (mm)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 19.9 / 21.7
- Luminaire luminous flux: 7200 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 123 (lm/W)
- System output: 59 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C