


Installation channel for individual luminaires. Aluminium profile, natural anodised, for cut-out ceilings. Trapezoid tray made of powder-coated sheet steel with holepattern on the bottom and lateral openings for light emission. Mounting via swivel bracket or optional wire suspension. Housing colour traffic white RAL 9016. Direct/indirect distribution. Fully integrated translucent lens optics made of acrylic with additional lateral transmission. Electrical connection via five-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm<sup>2</sup>. Available accessories: Wire suspension to bare ceiling fino-ETS (135 0080 105)




- Article No.: 1351346600
- Housing material: Aluminium
- Housing colour: traffic white RAL 9016
- Light distribution: direct/indirect distribution
- Type of installation: Individual recessed mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

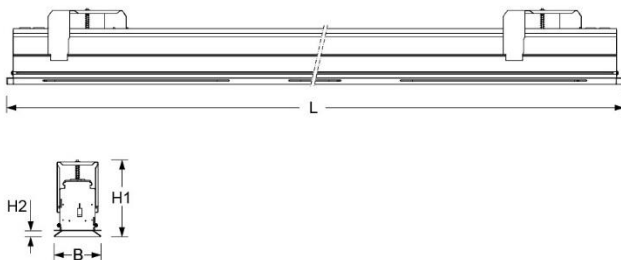

- Dimensions LxWxH/DxH: 1404 x 86 x 141 (mm)
- Ceiling system: cut-out ceilings [AD]
- Ceiling cut-out LxW/D: 1394 x 77 (mm)
- Ceiling thickness min/max: 11 / 30 (mm)
- Installation depth: 135(AD) (mm)
- Weight (net): 5.1 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 98 % / 2 %
- UGR lat/lon: 20.4 / 20.0
- Luminaire luminous flux: 3400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 124 (lm/W)
- System output: 27 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D