


Pendant luminaire. Aluminium profile, natural anodised. Face ends sheet steel, painted white aluminium. Housing colour aluminium, naturally anodised. Direct distribution. Transparent polycarbonate extruded profile with an inserted micro-prismatic diffuser and white reflectors. Translucent connection cable pre-mounted. Y-wire suspension with rapid coupling, free height adjustment between 150 and 2000mm.




- Article No.: 5355146650
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

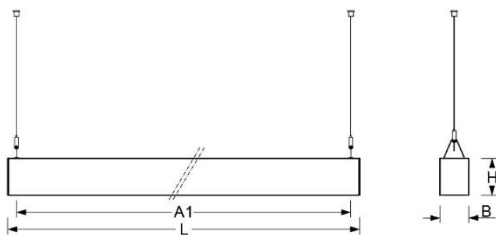

- Dimensions LxWxH/DxH: 1424 x 72 x 92 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1380 (mm)
- Weight (net): 5.2 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 19.9 / 21.7
- Luminaire luminous flux: 3600 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 123 (lm/W)
- System output: 29 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C