


Pendant system luminaire. Aluminium profile, natural anodised with white reflector. Housing colour aluminium, naturally anodised. Flat translucent polycarbonate extruded profile, with inserted microprismatic diffusor; self-engaging. Electrical connection via five-pole feed-in and connection terminal with plug-in technology, with integrated protective earth connection and unlocking button, suitable for rigid and flexible cables up to 2,5mm<sup>2</sup>. Through wiring plug-in system 10A. Available accessories: Face-ends with wire suspension Set fino-HTE LED (K/MP) (5350110105); wire suspension fino-SAY (5350000105); connection cable fino-AL 5x0,75 (5350057105);




- Article No.: 5354146605+1351100150
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Pendant light strip mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

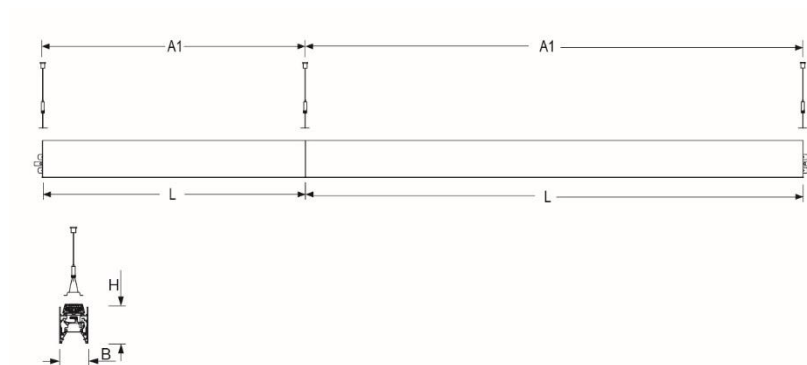

- Dimensions LxWxH/DxH: 1129 x 72 x 92 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1129 (mm)
- Weight (net): 3.7 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 19.8 / 21.6
- Luminaire luminous flux: 2900 (lm)
- LED service life: L80/B10 50000
- Luminaire luminous efficacy: 123 (lm/W)
- System output: 24 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz