


Light furniture. Base part with clamping mechanism made of galvanised steel. Inner mounting plate for taking up the electrical components made of stainless steel. Cover made of massive frosted acrylic glass with welded edges. Suitable for use in public space. Housing colour stainless steel. Modular LED technology with wide beam Individual Lens Optic for a homogeneous appearance. Electrical connection via 5-pole plugin connection terminal; with integrated earth conductor connection and unlocking button, suitable for rigid and flexible cables up to 2.5mm<sup>2</sup>. Protected by internal weatherproof junction box.




- Article No.: 8480014120
- Housing material: Stainless steel (V2A)
- Housing colour: stainless steel
- Light distribution: direct distribution
- Type of installation: Free-standing
- Certification mark: IP 65, Protection class I, VDU 65°<1000, F, CE

## Dimensions

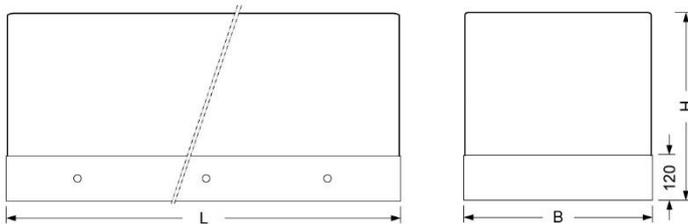

- Dimensions LxWxDxH: 1700 x 500 x 500 (mm)
- Mounting distance A1: 366 (mm)
- Mounting distance A2: 396 (mm)
- Weight (net): 86.18 (kg)
- Cable entry KE X/Y: 770 (mm) / 130 (mm)

## Lighting/Electrical

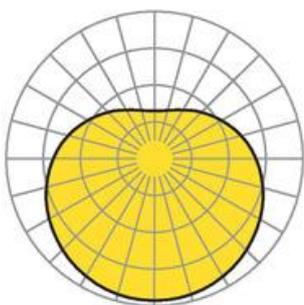

- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: 61 % / 39 %
- UGR lat/lon: 10.9 / 12.6
- Luminaire luminous flux: 2100 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 55 (lm/W)
- System output: 37 (W)
- Controller: Electronic driver (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: Z