


Pendant luminaire. Aluminium profile with rectangular design, face ends with mitred cut, natural anodised. Housing colour aluminium, naturally anodised. Direct/indirect distribution. Direct distribution via LED single lens optics, indirect distribution via clear pane. For VDU workstations $65^\circ < 3000\text{cd/m}^2$, $\text{UGR} \leq 19$ according to DIN EN 12464-1. Ceiling canopy aluminium profile. Translucent connection cable pre-mounted. Y-wire suspension with or without electrical connection, free height adjustment between 150 and 2000mm, translucent connection cable.




- Article No.: 5192034200
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct narrow/wide distribution, indirect, open distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, VDU $65^\circ < 3000$, F, Indoor, CE

Dimensions

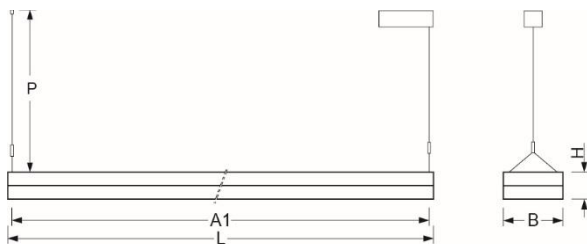

- Dimensions LxWxH/DxH: 1526 x 140 x 63 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1491 (mm)
- Weight (net): 7.5 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 54 % / 46 %
- UGR lat/lon: 14.3 / 14.0
- Luminaire luminous flux: 8400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 128 (lm/W)
- System output: 66 (W)
- Controller: Electronic driver (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: Z