


Surface-mounted luminaire. Aluminium profile, natural anodized. Corners with mitred cut. Suitable for ceiling- and wall-mounting. Housing colour aluminium, naturally anodised. Direct distribution. Microprismatic panel with conical glare elimination. For VDU workstations $65^\circ < 3000\text{cd/m}^2$, $\text{UGR} \leq 19$ according to DIN EN 12464-1. Electrical connection via tree-pole connection terminal with plug-in contacts; with integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm^2 .




- Article No.: 5103024195
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct distribution
- Type of installation: Individual surface mounting
- Certification mark: IP 20, Protection class I, VDU $65^\circ < 3000$, F, Indoor, CE

Dimensions

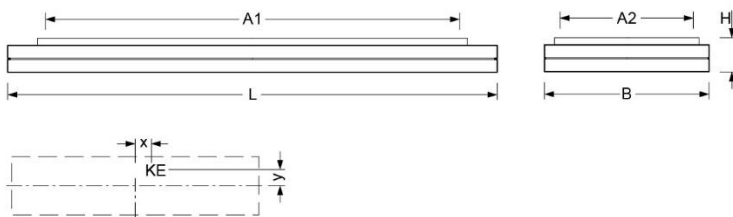

- Dimensions LxWxH/DxH: 1225 x 412 x 85 (mm)
- Mounting distance A1: 1100 (mm)
- Mounting distance A2: 290 (mm)
- Weight (net): 9.1 (kg)
- Cable entry KE X/Y: 0 (mm) / 155 (mm)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 18.3 / 18.3
- VDU: $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 5200 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 143 (lm/W)
- System output: 36 (W)
- Controller: Electronic driver (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: B