


Recessed luminaire. Extremely flat, frameless recessed luminaire made of sheet steel. Suitable for cut-out ceilings. Bottom of the housing one-piece with hole pattern. Toolless mounting by means of fixing springs. Housing colour traffic white RAL 9016. Direct narrow-wide light distribution. Fully integrated translucent lens optics made of acrylic. Glare rating $UGR \leq 19$. Electrical connection via five-pole connection terminal with plug-in contact. With integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm²




- Article No.: 7683046630
- Housing material: steel
- Housing colour: traffic white RAL 9016
- Light distribution: direct narrow/wide distribution
- Type of installation: Individual recessed mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

Dimensions

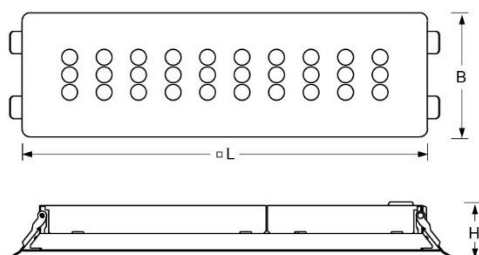

- Dimensions LxWxH/DxH: 360 x 110 x 42 (mm)
- Ceiling system: cut-out ceilings [AD]
- Ceiling cut-out LxW/D: 350 x 90 (mm)
- Ceiling thickness min/max: 10 / 20 (mm)
- Installation depth: 70(AD) (mm)
- Weight (net): 1.2 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 18.9 / 18.6
- Luminaire luminous flux: 1400 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 122 (lm/W)
- System output: 11 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D