


Pendant luminaire. Side parts aluminium profile, natural anodised. Face ends and top of the housing painted sheet steel. Housing colour aluminium, naturally anodised. Direct/indirect distribution. Parabolic aluminium louvre, semi-specular anodised. For VDU workstations $65^\circ < 3000\text{cd/m}^2$, $\text{UGR} \leq 19$ according to DIN EN 12464-1. Translucent connection cable pre-mounted. Y-wire suspension with quick-adjust coupling, free height adjustment between 150 and 2000mm.




- Article No.: 6710106665
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct/indirect distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, VDU $65^\circ < 3000$, F, Indoor, CE

Dimensions

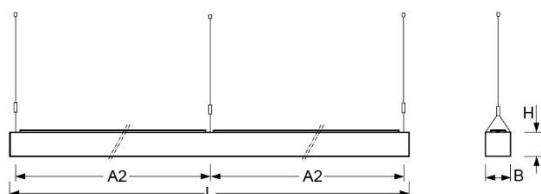

- Dimensions LxWxH/DxH: 2858 x 62 x 71 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 2834 (mm)
- Mounting distance A2: 1417 (mm)
- Weight (net): 9.5 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 82 % / 18 %
- UGR lat/lon: 18.6 / 17.8
- VDU: $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 9600 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 100 (lm/W)
- System output: 96 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C