


Free-standing luminaire. Standing luminaire with ultra-flat head. Luminaire head and column made of an extruded aluminium profile, natural anodized. Black switch. Stable, sand-cast base coloured black. Housing colour aluminium, naturally anodised. Direct/indirect light distribution. Direct ratio glare control via PMMA microprism pane. Indirect ratio via special acrylic pane. For VDU workstations $65^\circ < 3000\text{cd/m}^2$, $\text{UGR} \leq 19$ according to DIN EN 12464-1. Luminaire master unit equipped with controller LC-OM DALIeco and sensor LC-OM DALIeco LS/PD LI for daylight and presence-dependent control. Direct and indirect ratio dimmable separately via integrated push button. 2,85m connection cable, black, with safety plug. The infra-red LC-OM Master Remote Kit remote control for commissioning and the infra-red remote control LC-OM User Remote for operation of the DALIeco (M5S5) light control system must be ordered separately. Infrared remote control LC-OM Master Remote Kit (850 1041 100) for commissioning and infrared remote control LC-OM User Remote (850 1042 100) for operating the DALI M5S5 luminaire.




- Article No.: 4711308175
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: direct/indirect distribution
- Type of installation: Free-standing
- Certification mark: IP 20, Protection class I, VDU $65^\circ < 3000$, F, Indoor, CE

Dimensions

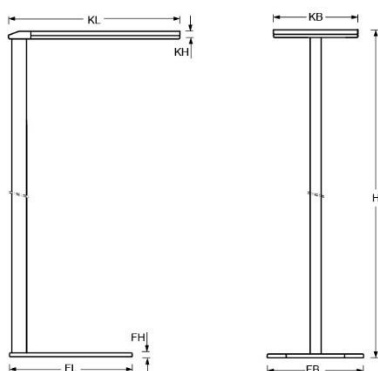

- Dimensions LxWxH/DxH: 680 x 330 x 1950 (mm)
- External driver housing LxWxH: 680 x 330 x 30 (mm)
- Weight (net): 18.42 (kg)

Lighting/Electrical

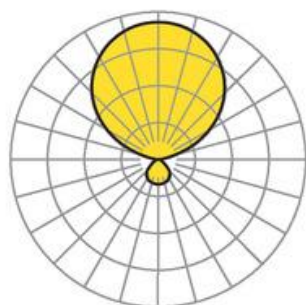

- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 13 % / 87 %
- VDU: $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 15700 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 153 (lm/W)
- System output: 103 (W)
- Controller: Electronic driver M5S5 DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz