



Pendant luminaire. Aluminium profile, naturally anodised. Face ends sheet steel. Textured paint traffic white (similar to RAL 9016). Housing colour traffic white RAL 9016. Direct- and indirect distribution via white-opal, satin-finished acrylic diffusor, separately dimmable. Translucent connection cable pre-mounted. Single wire suspension with quick-adjust coupling, free height adjustment between 150 and 2000mm.

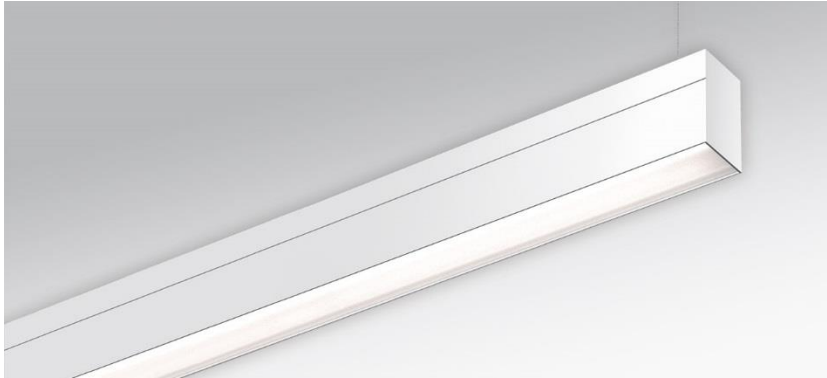


- Article No.: 5434126981
- Housing material: Aluminium
- Housing colour: traffic white RAL 9016
- Light distribution: direct/indirect distribution
- Type of installation: Pendant individual mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

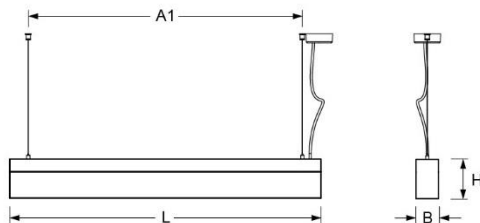

- Dimensions LxWxH/DxH: 1127 x 61 x 106 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1025 (mm)
- Weight (net): 4.7 (kg)

## Lighting/Electrical

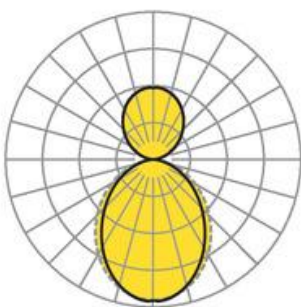

- Placement: LED, Colour rendering/Light colour CRI  $\geq 90$  / 2700K-6500K continuously adjustable
- Direct/Indirect: 64 % / 36 %
- UGR lat/lon: 21.9 / 23.2
- Luminaire luminous flux: 6100 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 87 (lm/W)
- System output: 70 (W)
- Controller: Electronic driver DALI device type 8 (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: E