


Pendant system luminaire. Aluminium profile incl. LED-unit for indirect share, 90° L-shaped, powder coated. Housing colour aluminium, naturally anodised. Indirect distribution. Constant indirect share via white-opal, satin-finished acrylic diffuser throughout all system components. Feed-in and through wiring plug-in system 10A. For system profile serio-HITB LB one wire suspension is in scope of delivery. Available accessories: face-ends with wire suspension incl. connection cord and canopy set serio-HITE LED A/E Set 5x0,75 vw (5430157101); connection cord serio-AL 5x0,75 (5430057105);



- Article No.: 5472146615
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: indirect distribution
- Type of installation: Pendant light strip mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

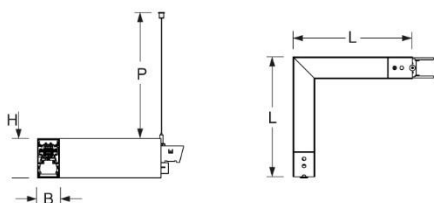

- Dimensions LxWxH/DxH: 335 x 61 x 106 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Weight (net): 2.4 (kg)

## Lighting/Electrical

- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: / 100 %
- Luminaire luminous flux: 1100 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 126 (lm/W)
- System output: 9 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C