


Pendant system luminaire. Aluminium profile incl. LED-unit for indirect share, naturally anodised.

Housing colour aluminium, naturally anodised. Indirect distribution. Constant indirect share via white-opal, satin-finished acrylic diffuser throughout all system components. The integrated 3-phase-track + DALI is able to carry emphara or spotty series spotlights. Other standard track lights can also be mounted. 7-pole phase track, 3x10A/N/PE + DALI. 5 poles usable. Pluggable through wiring 10A. Usable track length: 1100mm, maximum load: 4kg; Spotlights must be ordered separately. For system profile serio-HITD LB one wire suspension is in scope of delivery. Available accessories: face-ends with wire suspension incl. connection cord and canopy set serio-HITE LED A/E Set 5x0,75 (5430157105); connection cord serio-AL 5x0,75 (5430057105).



- Article No.: 5435146635
- Housing material: Aluminium
- Housing colour: aluminium, naturally anodised
- Light distribution: indirect distribution
- Type of installation: Pendant light strip mounting
- Certification mark: IP 20, Protection class I, F, Indoor, CE

## Dimensions

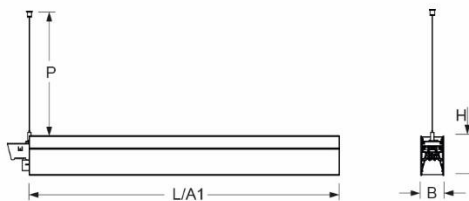

- Dimensions LxWxH/DxH: 1405 x 61 x 106 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1405 (mm)
- Weight (net): 7 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K
- Direct/Indirect: / 100 %
- Luminaire luminous flux: 2800 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 121 (lm/W)
- System output: 23 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C