


Pendant system luminaire. Aluminium profile incl. LED-unit for indirect share, naturally anodised. Integrated built-in spotlights in the bottom of the housing. Housing colour aluminium natural anodized/black. Direct/indirect distribution, DALI Variant separately dimmable. Constant indirect share via white-opal, satin-finished acrylic diffuser throughout all system components. Direct share via integrated built-in spotlights; beam angle 25°. UGR ≤ 19. Feed-in and through wiring plug-in system 10A. For system profile serio-HITES LB one wire suspension is in scope of delivery. Available accessories: face-ends with wire suspension incl. connection cord and canopy set serio-HITE LED A/E Set 5x0,75 (5430157105); connection cord serio-AL 5x0,75 (5430057105).




- Article No.: 5436146675
- Housing material: Aluminium, Mix
- Housing colour: aluminium natural anodized/black
- Light distribution: direct/indirect distribution
- Type of installation: Pendant light strip mounting
- Certification mark: IP 20, Protection class I, VDU 65° < 1000, F, Indoor, CE

## Dimensions

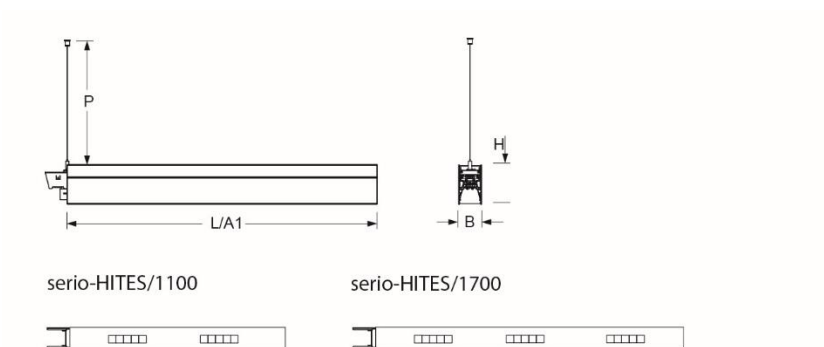

- Dimensions LxWxH/DxH: 1685 x 61 x 106 (mm)
- Pendant length min/max: 150 / 2000 (mm)
- Mounting distance A1: 1685 (mm)
- Weight (net): 7.6 (kg)

## Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 39 % / 61 %
- UGR lat/lon: 10.0 / 10.0
- Luminaire luminous flux: 5300 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 107 (lm/W)
- System output: 50 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C