


Recessed luminaire. Sheet steel housing, painted, suitable for ceilings with visible T-rails 24mm. Suitable for food and beverage industries according to DIN 10500/Food. The protection rating applicable to visible luminaire surface. Housing colour traffic white RAL 9016. Direct distribution. Homogeneous illumination by satinised special acrylic panel, with high transmission. Luminaire in tunable white technology for Human Centric Lighting. Light colours 927/warm white (2700K) - 965/daylight white (6500K), continuously adjustable. Suitable for VDU workstations according to DIN-EN 12464-1, $65^\circ < 3000 \text{ cd/m}^2$. Electrical connection via five-pole connection terminal with plug-in contact. With integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5 mm^2



- Article No.: 7220066910
- Housing material: steel
- Housing colour: traffic white RAL 9016
- Light distribution: direct distribution
- Type of installation: Recessed mounting
- Certification mark: IP 54, Protection class I, F, F-“roof” mark, HACCP DIN10500/Food/IFS/BRC, Indoor, CE

Dimensions

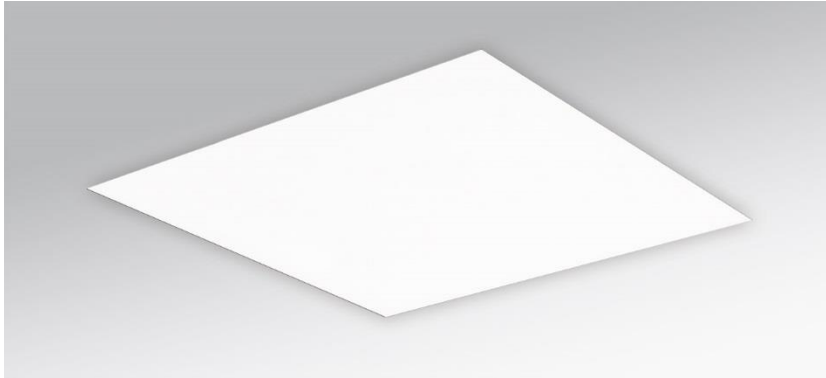

- Dimensions LxWxH/DxH: 622 x 622 x 81 (mm)
- Ceiling system: Ceilings with visible T-rails / 24mm [s-TS] (625x625mm)
- Module axis LxW: 625 x 625 (mm)
- Installation depth: 180(s-TS) (mm)
- Weight (net): 4.5 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 90 / 2700K-6500K continuously adjustable
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 21.1 / 21.1
- Luminaire luminous flux: 4600 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 122 (lm/W)
- System output: 38 (W)
- Controller: Electronic driver DALI device type 8 (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D