


Recessed downlight. Rectangular sheet steel housing with minimalistic rim for cut-out ceilings. Fine structure paint traffic white (similar to RAL 9016). With fastening springs for tool-free assembly. Housing colour traffic white RAL 9016/silver. Direct narrow-wide light distribution. Highly efficient combination of micro cell louvre in silver and narrow-wide lens optics. For VDU workstations $65^\circ < 3000\text{cd/m}^2$, glare rating $\text{UGR} \leq 19$ according to DIN EN 12464-1. External supply unit with luminaire wired ready for operation. Electrical connection via four-pole connection terminal in plug-in contact technology.




- Article No.: 3907546660
- Housing material: steel
- Housing colour: traffic white RAL 9016/silver
- Light distribution: direct narrow/wide distribution
- Type of installation: Individual recessed mounting
- Certification mark: IP 20, Protection class II, VDU $65^\circ < 3000$, F, Indoor, CE

Dimensions

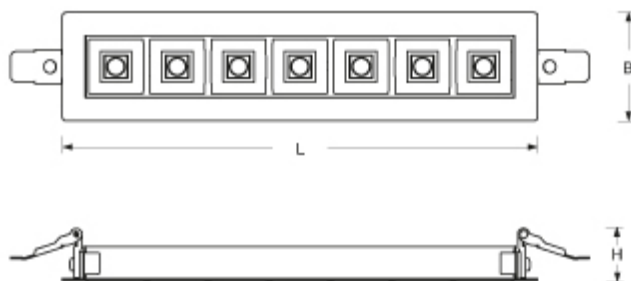

- Dimensions LxWxD: 310 x 71 x 34 (mm)
- External driver housing LxWxD: 120 x 51 x 30 (mm)
- Ceiling system: cut-out ceilings [AD]
- Ceiling cut-out LxW/D: 305 x 50 (mm)
- Ceiling thickness min/max: 1 / 25 (mm)
- Installation depth: 50(AD) (mm)
- Weight (net): 0.5 (kg)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 100 % / 0 %
- UGR lat/lon: 19.0 / 18.7
- Luminaire luminous flux: 1300 (lm)
- LED service life: 100000h L80/B10 (Tq 25°C), 50000h L90/B50 (Tq 25°C)
- Luminaire luminous efficacy: 149 (lm/W)
- System output: 9 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class/light source: B