


Surface-mounted luminaire. Sheet steel housing, painted. Arrangeable as optically continuous light-lines through easy removable end-caps. Housing colour white aluminium RAL 9006. Direct wide light distribution. Translucent lens optics made of acrylic with additional lateral transmission. Electrical connection via five-pole connection terminal with plug-in contact. With integrated protective earth conductor connection and release button, suitable for rigid and flexible conductors up to 2.5mm². Available accessories: For surface mounting as continuous light-line one through-wiring clip-on-DV (771 9000 100) per joint is needed. For pendant mounting as single luminaire one mounting kit clip-on-SAES (771 0057 105) is required. For pendant mounting as continuous light-line one suspension set clip-on-SAES (771 0057 105) is needed. Additionally for each joint one suspension clip-on-SAVS (771 0000 105) and one through-wiring clip-on-DV (771 9000 100) is necessary. Suspension length 2000mm.




- Article No.: 7711546606
- Housing material: steel
- Housing colour: white aluminium RAL 9006
- Light distribution: direct wide distribution.
- Type of installation: Individual surface mounting, Surface-mounted light run installation
- Certification mark: IP 20, Protection class I, F, Indoor, CE

Dimensions

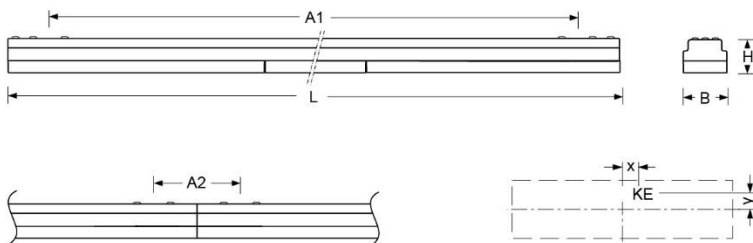

- Dimensions LxWxH/DxH: 1527 x 55 x 44 (mm)
- Mounting distance A1: 1425 (mm)
- Mounting distance A2: 101 (mm)
- Weight (net): 2.7 (kg)
- Cable entry KE X/Y: 0 (mm) / 0 (mm)

Lighting/Electrical

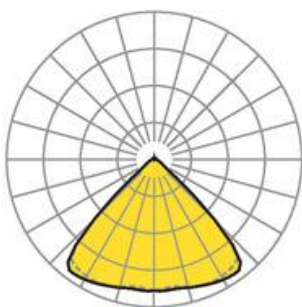

- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 98 % / 2 %
- UGR lat/lon: 19.7 / 20.1
- Luminaire luminous flux: 5500 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 165 (lm/W)
- System output: 33 (W)
- Controller: Electronic driver DALI (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D