


Surface-mounted luminaire. Round luminaire housing made of deep-drawn sheet steel. Suitable for ceiling and wall installation. Housing colour traffic white RAL 9016. Direct distribution. Round, domed acrylic glass diffuser, with opal frosted, smooth surface. For VDU workstations according to DIN EN 12464-1, $65^\circ < 3000\text{cd/m}^2$. Electrical connection via 3-pole plug-in connection terminal. With integrated earth conductor connection and unlocking button, suitable for rigid and flexible cables up to $2,5\text{ mm}^2$. With integrated HF motion sensor. Range 1-8m, time setting 30sec -30min. and brightness threshold value of 2 to 2000lx continuously adjustable. Switching capacity max. 4 luminaires drop 400 or drop 500. Available accessories: Decorative ring sheet steel, silver (231 2000 100).




- Article No.: 2340124110
- Housing material: steel
- Housing colour: traffic white RAL 9016
- Light distribution: direct distribution
- Type of installation: Individual surface mounting
- Certification mark: IP 40, Protection class I, VDU $65^\circ < 3000$, Heat filament test 650°C , F, Indoor, CE, Impact resistance 0.20J

Dimensions

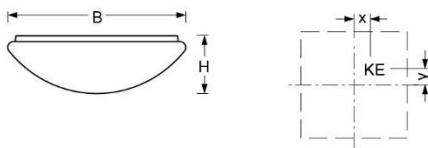

- Dimensions LxWxH/DxH: 373 x 125 (mm)
- Mounting distance A1: 272 (mm)
- Weight (net): 1.6 (kg)
- Cable entry KE X/Y: 77 (mm) / 0 (mm)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 3000K
- Direct/Indirect: 86 % / 14 %
- UGR lat/lon: 20.6 / 20.6
- VDU: $65^\circ < 3000\text{cd/m}^2$
- Luminaire luminous flux: 2100 (lm)
- LED service life: 050000h L80/B10
- Luminaire luminous efficacy: 116 (lm/W)
- System output: 18 (W)
- Controller: Electronic driver + motion sensor S9 (1 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: D