


Wall system luminaire. Aluminium profile, naturally anodised. Housing colour traffic white RAL 9016. Direct/indirect distribution. Direct asymmetric light distribution via Fresnel lens made from acrylic. Indirect share via white-opal, satin-finished endless diffusor serio-G. Direct/indirect share separately dimmable via DALI. Electrical connection via five-pole feed-in and connection terminal with plug-in technology; with integrated protective earth connection and unlocking button, suitable for rigid and flexible cables up to 2,5mm². 5-pole through wiring plugin system 10A. Mounting system to compensate uneven surfaces (1-15mm). Face ends serio-WITE A/E LB and endless diffusor serio-G for indirect share, must be ordered separately according to total system length. Available accessories: Face-end Set serio-WITE LED A/E vw (4430107101); endless diffusor 6m serio-G/06000 LED (5430600180); 10m serio-G/10000 LED (5431000180); 20m serio-G/20000 LED (5432000180).



- Article No.: 4435146601
- Housing material: Aluminium
- Housing colour: traffic white RAL 9016
- Light distribution: direct asymmetric distribution/ indirect symmetric distribution
- Type of installation: Wall light run installation
- Certification mark: IP 20, Protection class I, F, Indoor, CE

Dimensions

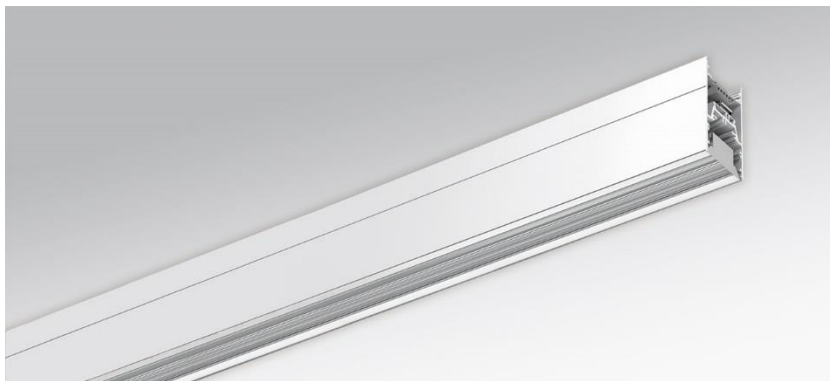

- Dimensions LxWxH/DxH: 1405 x 61 x 106 (mm)
- Depth: 86 (mm)
- Mounting distance A1: 1170 (mm)
- Mounting distance A2: 235 (mm)
- Weight (net): 7 (kg)
- Cable entry KE X/Y: 657 (mm) / 19 (mm)

Lighting/Electrical



- Placement: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
- Direct/Indirect: 45 % / 55 %
- Luminaire luminous flux: 8100 (lm)
- LED service life: 50000h L80/B10 (Tq 25°C)
- Luminaire luminous efficacy: 117 (lm/W)
- System output: 69 (W)
- Controller: Electronic driver DALI (2 pcs.)
- Mains voltage max.: 230 V / 50 Hz
- Energy efficiency class: C